


## RST Rescue Rods

Nominal voltages up to 36 kV / 50 Hz

## SAFETY EQUIPMENT


### OPERATING RODS

Based on DIN VDE 0681 Part 1

- Not for use in wet weather 
- For use in indoor and outdoor installations
- Fixed rescue hook, protected against bridging
- For rescuing persons (up to approx. 100 kg) from the live working zone in the event of electrical accidents



Rescuing an electric shock victim from the live working zone by means of an insulated RST rescue rod.

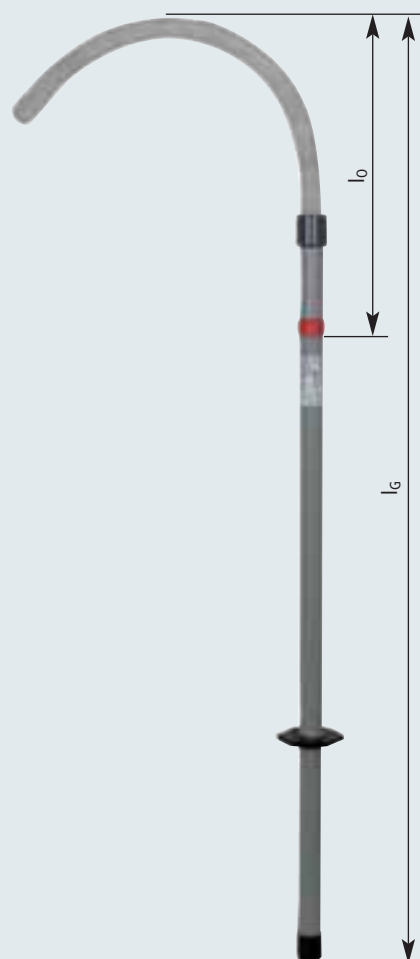

#### Technical Data

Hook	PVC-HI complete rod
Insulating tube	Glas-fibre-reinforced polyester tube, Ø30 mm, grey
Sealing unit	Non-slip plastic cap

Type	Total length $l_G$	Insertion depth $l_0$	Part No.
<b>A Rescue Rod up to 36 kV</b>			
RST 36 1000	1000 mm	175	766 040
RST 36 1500	1500 mm	425	766 041
RST 36 2000	2000 mm	775	766 042



#### Accessories for RST Rescue Rods

##### Storage Device

Wall-mounted

Type	Colour	Diameter	Dimensions	Part No.
HV P ST D30	●	30 mm	430 mm	700 007