

## TRS NS Dry Cleaning Kit




Nominal voltages up to 1000 V / 15 ... 60 Hz

LIVE CLEANING EQUIPMENT



Based on DIN VDE 0680 Part 3  
Tubes according to IEC 61235

- Not for use in wet weather 
- For indoor and outdoor installations
- Equipment for live cleaning by means of suction
- For dry cleaning of cable distribution cabinets, open indoor installations and control cabinets
- Specially adapted operating heads for intensive cleaning
- Plug-in coupling system allows fast replacement of the operating heads
- Regulation of intake air in the handle area



Live cleaning of a low-voltage switchgear installation using the TRS NS dry cleaning kit

### Requirements


TRS NS allows maintenance work to be done under supervision of a qualified electrician at voltages up to 1000 V according to EN 50110-1 "Operation of electrical installations – Minimum Requirements". In Germany apply sections BGV A3 and of the national accident prevention regulations (UVV) "Elektrische Anlagen und Betriebsmittel" [Electrical installations and equipment] issued by the German Employer's Liability Association for Precision and Electrical Engineering (BGFE).



Chamfered flat cleaning head in use.



Tubular brush in use.

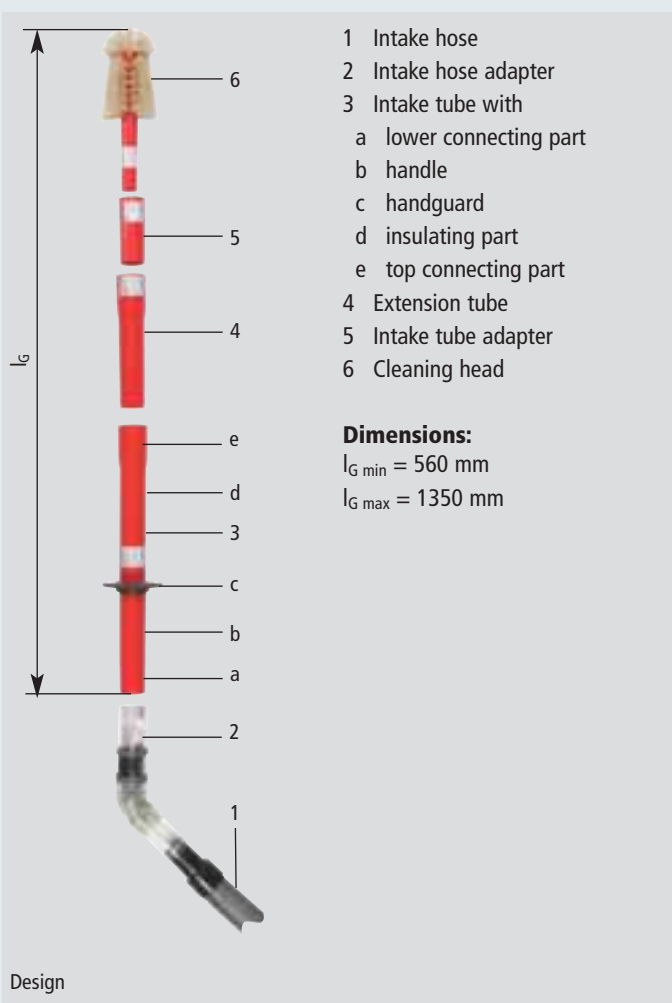

LIVE CLEANING EQUIPMENT

Type	Model	Part No.
------	-------	----------

**A TRS NS Dry Cleaning Kit**

Standard kit includes:

Pos.	Qty.	Type	Description	Part No.
1	1	SRH 400 NS	Intake tube with handle	785 520
2	1	SRV 200 NS	Extension, 200 mm	785 521
3	1	SRV 300 NS	Extension, 300 mm	785 522
4	1	SRV 400 NS	Extension, 400 mm	785 523
5	1	SRW V NS	Angle, adjustable	782 530
6	1	FD 55 NS	Flat cleaning head 55	785 540
7	1	FD 35 NS	Flat cleaning head 35	785 541
8	1	FD 35 S NS	Flat cleaning head 35, chamfered	785 542
9	1	FD 35 P NS	Flat cleaning head 35, straight	785 590
10	1	FD 35 W P NS	Flat cleaning head 35, angled	785 591
11	1	RD 25 S NS	Round cleaning head with scraper	785 560
12	1	QD 35 W NS	Cross cleaning head 35	785 543
13	1	RD 25 P NS	Round cleaning head with brush	785 570
14	1	STB 85 Z NS	Tubular brush, cylindrical bristles	785 550
15	1	STB 85 K NS	Tubular brush, conical bristles	785 555
16	1	SRA NS	Intake tube adapter, for brushes and cleaning heads	785 515
37	1	SSA W D	Intake hose adapter	785 200
17	3	EP 25 K NS	Spare brush, short bristles	785 595
18	3	EP 25 L NS	Spare brush, long bristles	785 596
43	1	RB 40 NS	Cleaning brush for individual kit parts Ø40 mm	785 580
44	1	RB 20 NS	Cleaning brush for individual kit parts Ø25 mm	785 585
19	1	KKL TRS NS	Plastic case	785 506



TRS NS	Contents and plastic case included	785 502
--------	------------------------------------	---------

Single Parts of TRS NS Dry Cleaning Kit

**Plastic Case, empty**

With retaining clips

Type	Colour	Dimensions	Position	Part No.
KKL TRS NS	●	530 x 390 x 170 mm	19	785 506



**Intake Tube with Handle**

For use as operating tube with handle and handguard, with top and lower connecting part

Type	Dimensions	Position	Part No.
SRH 400 NS	380 mm	1	785 520



# Single Parts of TRS NS Dry Cleaning Kit



## LIVE CLEANING EQUIPMENT

### Extension

Insulating tube, with top and lower connecting part



Type	Diameter	Dimensions	Position	Part No.
SRV 200 NS	40 mm	200 mm	2	785 521
SRV 300 NS	40 mm	300 mm	3	785 522
SRV 400 NS	40 mm	400 mm	4	785 523

### Adjustable Angle

Lockable, adjustable due to 15° gearing, with top and lower connecting part



Type	Diameter	Dimensions	Position	Part No.
SRW V NS	40 mm	300 mm	5	785 530

### Flat Cleaning Head 55

Width: 55 mm



Type	Diameter	Dimensions	Position	Part No.
FD 55 NS	40 mm	200 mm	6	785 540

### Flat Cleaning Head 35

Width: 35 mm



Type	Diameter	Dimensions	Position	Part No.
FD 35 NS	25 mm	200 mm	7	785 541

### Flat Cleaning Head 35

Width: 35 mm, Outlet: 60°, chamfered



Type	Diameter	Dimensions	Position	Part No.
FD 35 S NS	25 mm	200 mm	8	785 542

### Flat Cleaning Head 35

Width: 35 mm, straight, with detachable brush



Type	Diameter	Dimensions	Position	Part No.
FD 35 P NS	25 mm	230 mm	9	785 590

### Flat Cleaning Head 35

Width: 35 mm, angled: 30°, with detachable brush



Type	Diameter	Dimensions	Position	Part No.
FD 35 W P NS	25 mm	240 mm	10	785 591

### Round Cleaning Head

With scraper 50 mm



Type	Diameter	Dimensions	Position	Part No.
RD 25 S NS	25 mm	240 mm	11	785 560

### Cross Cleaning Head 35

Width: 35 mm, angled (30°)



Type	Diameter	Dimensions	Position	Part No.
QD 35 W NS	25 mm	200 mm	12	785 543

## LIVE CLEANING EQUIPMENT

### Round Cleaning Head

With brush

Type	Diameter	Dimensions	Position	Part No.
RD 25 P NS	25 mm	230 mm	13	785 570



### Tubular Brush

Cylindrical bristles

Type	Diameter	Dimensions	Position	Part No.
STB 85 Z NS	25 / 85 mm	240 mm	14	785 550



### Tubular Brush

Conical bristles

Type	Diameter	Dimensions	Position	Part No.
STB 85 K NS	25 / 85 mm	240 mm	15	785 555



### Intake Tube Adapter

For brushes and cleaning heads Ø25 mm

Type	Diameter	Dimensions	Position	Part No.
SRA NS	40 / 25 mm	100 mm	16	785 515



### Intake Hose Adapter

Adjustable, angled (120°), with regulation of intake air, for use with intake hose system Ø35 mm

Type	Diameter	Position	Part No.
SSA W D	35 / 40 mm	37	785 200



### Spare Brush

Short bristles, for flat cleaning heads with detachable brush

Type	Dimensions	PU	Position	Part No.
EP 25 K NS	25 mm	3 pc(s).	17	785 595



### Spare Brush

Long bristles, for flat cleaning heads, with detachable brush

Type	Dimensions	PU	Position	Part No.
EP 25 L NS	40 mm	3 pc(s).	18	785 596



### Cleaning Brush

For individual kit parts Ø40 mm

Type	Diameter	Dimensions	Position	Part No.
RB 40 NS	45 mm	410 mm	43	785 580



### Cleaning Brush

For individual kit parts Ø25 mm

Type	Diameter	Dimensions	Position	Part No.
RB 20 NS	30 mm	330 mm	44	785 585

